

# FLOW METER

## Model **TTFH**

Variable area flow meter model TTFH is designed for measuring and monitoring of large water flows.



Model TTFH

### FEATURES

- Sturdy construction
- Flanged connections

### TYPICAL APPLICATIONS

- Water treatments plants
- Power plants

### OPTIONS

- Low flow alarm
- Viton® or EPDM seals

# TTFH




## Technical data TTFH

<b>Model</b>	<b>TTFH -</b>
Connections	DN 80
Max. pressure	16 bar
Max. temperature	75 °C
Weight	17,5 kg
Body	AISI 316
Float	AISI 329
Flowtube	Acrylic
Seals	Nitrile (*Viton®, EPDM)
Accuracy	± 5 % F.S.

\*) Special construction on request

TT	-	-	-	
				<b>Special feature</b>
			V	Viton® -seals
				<b>Scale</b>
		A		H <sub>2</sub> O (l/min) at +20°C
				<b>Flow range</b>
		4A		75 - 600 l/min
		4B		100 - 1000 l/min
				<b>Connections</b>
		FH		DN 80 flanges

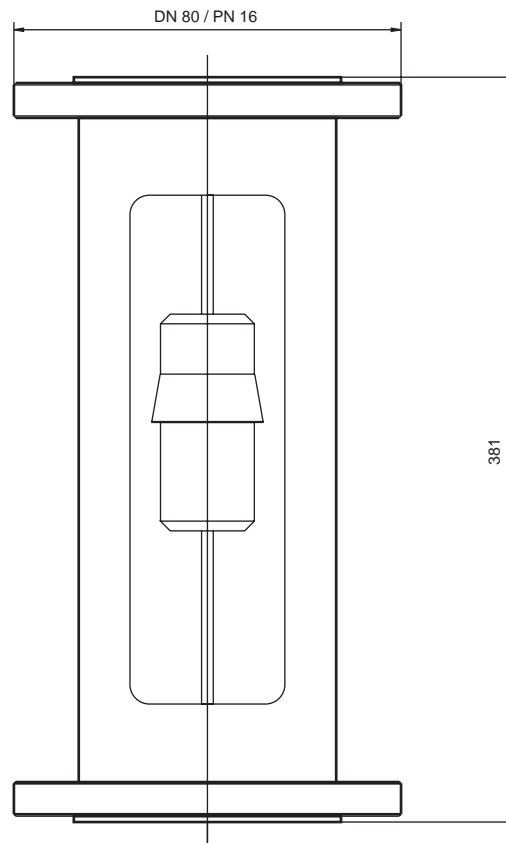

MANUFACTURER

**Kytola**  
INSTRUMENTS

KYTOLA OY • Olli Kytolan tie 1  
P.O. Box 5 • FI-40951 MUURAME • FINLAND  
Phone +358 207 7906 90 • Fax +358 14 631 419  
E-mail sales@kytola.com • www.kytola.com

LOCAL REPRESENTATIVE